


3.4 Double-Tee Load Tables (cont.)

Strand Pattern Designation

Number of strand (16)
 S = straight D = depressed
 1 6 8 - D 1
 Number of depression points
 Diameter of strand in 16ths

Safe loads shown include dead load of 10 lb/ft² for untopped members and 15 lb/ft² for topped members. Remainder is live load. Long-time cambers include superimposed dead load but do not include live load.

12'-0" x 28" Normalweight Concrete

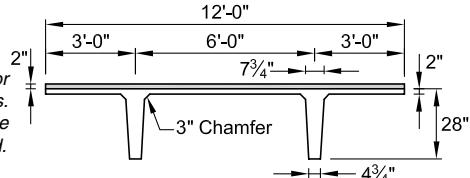

Section Properties

	No Topping	2 in. Topping
A	= 640 in. ²	-
I	= 44,563 in. ⁴	57,323 in. ⁴
y _b	= 20.01 in.	22.47 in.
y _t	= 7.79 in.	7.53 in.
S _b	= 2227 in. ³	2551 in. ³
S _t	= 5577 in. ³	7613 in. ³
wt	= 677 lb/ft	977 lb/ft
DL	= 56 lb/ft ²	81 lb/ft ²
V/S	= 1.62 in.	

Key

133 – Safe superimposed service load, lb/ft²
 0.8 – Estimated camber at erection, in.
 1.1 – Estimated long-time camber, in.

$$f'_c = 5000 \text{ psi}$$

$$f_{pu} = 270,000 \text{ psi}$$

1/2-in.-diameter regular strand

Check with regional producers for availability.

12DT28

Table of safe superimposed service load, lb/ft², and cambers, in.

Strand pattern	y _s (end) y _s (center) in.	Span, ft																		No Topping			
		40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72	74	76	78	80	82
108-S	6.00	133	117	102	90	79	70	62	54	47	41	36	31	26									
	0.8	0.8	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.8	0.7	0.6	0.5	0.4									
	1.1	1.2	1.2	1.3	1.3	1.3	1.3	1.2	1.2	1.1	1.0	0.8	0.7	0.4									
128-S	7.00	157	139	123	109	96	86	76	67	60	53	47	41	36	31	27							
	1.0	1.0	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.0	1.0	0.9	0.8	0.6	0.4								
148-S	8.00	178	158	140	125	111	99	88	79	71	63	56	50	44	39	34	30	26					
	1.1	1.1	1.2	1.2	1.3	1.3	1.3	1.3	1.3	1.3	1.2	1.1	1.0	0.9	0.7	0.6	0.3						
	1.5	1.5	1.6	1.7	1.7	1.8	1.8	1.8	1.8	1.8	1.7	1.7	1.5	1.4	1.2	0.9	0.7	0.3					
168-S	9.00	196	174	155	138	123	110	99	89	79	71	64	57	51	46	40	35	30	26				
	1.1	1.2	1.3	1.3	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.3	1.2	1.1	1.0	0.8	0.6	0.3					
	1.6	1.6	1.7	1.8	1.9	1.9	1.9	2.0	2.0	1.9	1.9	1.8	1.6	1.5	1.2	1.0	0.7	0.3					
168-D1	13.00																						
	3.75	180	162	146	132	119	108	98	89	80	72	64	58	52	47	42	38	34	30	26			
188-D1	14.39																						
	4.00	180	162	146	132	119	108	98	89	80	72	64	58	52	47	42	38	34	30	26			
		1.6	1.7	1.8	1.9	1.9	1.9	2.0	2.0	2.0	2.0	2.0	1.9	1.8	1.7	1.6	1.5	1.4	1.3	1.2	1.1	0.7	0.2

12DT28 + 2

Table of safe superimposed service load, lb/ft², and cambers, in.

2 in. Normalweight Topping

Strand pattern	y _s (end) y _s (center) in.	Span, ft																					
		40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72					
108-S	6.00	127	110	95	82	70	60	51	42	35	29												
	0.8	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.8	0.8	0.7												
	0.8	0.8	0.8	0.8	0.8	0.7	0.6	0.5	0.3	0.1	-0.1												
128-S	7.00	154	134	117	102	88	77	66	57	49	41	32											
	1.0	1.0	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.0	0.9											
148-S	8.00	177	155	136	119	105	92	80	70	60	50	41	32										
	1.1	1.1	1.2	1.2	1.3	1.3	1.3	1.3	1.3	1.3	1.2	1.2	1.1										
	1.1	1.2	1.2	1.2	1.2	1.1	1.1	1.0	0.9	0.8	0.6	0.3	0.1										
168-S	9.00	197	173	152	134	118	104	90	78	66	56	47	39	31									
	1.1	1.2	1.3	1.3	1.4	1.4	1.4	1.4	1.4	1.4	1.4	1.3	1.3	1.2									
	1.2	1.3	1.3	1.3	1.3	1.2	1.2	1.1	1.0	0.9	0.8	0.5	0.3	0.0									
168-D1	13.00																						
	3.75	199	177	157	140	125	111	97	84	72	62	52	43	36	30								
188-D1	14.39																						
	4.00	199	177	157	140	125	111	97	85	73	63	54	45	37	31								
		1.7	1.7	1.7	1.8	1.7	1.7	1.7	1.6	1.5	1.3	1.1	0.8	0.5	0.2	-0.2							

Strength is based on strain compatibility; bottom tension is limited to $12\sqrt{f_c}$; see pages 3-8 through 3-11 for explanation.

Shaded values require release strengths higher than 3500 psi.